


PARIS 70-3C / PARIS 70-3C VISION



OPCIONAL KIT-AIR2: KIT CON TOMA DE AIRE EXTERNO. PARA CONVERTIR EN ESTANCO.
 OPTIONAL KIT-AIR2: KIT WITH EXTERNAL AIR INTAKE. FOR HERMETIC SYSTEM.
 KIT-AIR2 OPCIONAL: KIT COM ENTRADA DE AR EXTERIOR. PARA PASSAR A ESTANQUE.
 OPZIONALE KIT-AIR2: KIT CON PRESA DI ARIA ESTERNA. PER RENDERLO STAGNO.
 OPTIONNEL KIT-AIR2: KIT AVEC PRISE D'AIR EXTERNE. POUR LE TRANSFORMER EN ETANCHE.




SILENCIOSA
NOISELESS
SILENCIOSA
SILENCIOSA

POSIBILIDAD DE DESCONEXIÓN DE LA TURBINA.
 POSSIBILITY OF TURNING OFF THE TURBINE.
 POSSIBILIDADE DE DESCONEXÃO DA TURBINA.
 POSSIBILITÄ DE DICONNECTER LA TURBINE.
 POSSIBILITÀ DI DISCONNESSIONE DELLA TURBINA.



Features

- Double Combustion System
- Clean Glass System
- Heating power: 13kw
- Efficiency (%): 77%
- Consumption (kg/h): 3,7kg/h
- Heating capacity (m3): 325m3
- Cast-iron interior
- Manufactured in cast-iron and sheet
- Weight (kg): 133kg
- Smoke exit tube diameter (mm): 150mm
- Air channel (diameter and exit tube number): 2x120
- Forced ventilation: 1x290
- Useful chamber measures: 580x306x286mm
- Maximum logs size (cm): 55cm

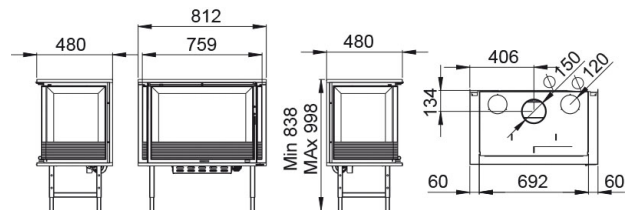

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com



©Bronpi Calefacción, S.L. reserves all rights to the images that appear in this document. You may not reproduce or distribute part or all of the photographs and as the text. Both the brand as distinctive symbols are the exclusive property of the company. Violators will be prosecuted according to law.