


PARIS 90-3C/PARIS 90-3C VISION



OPCIONAL KIT-AIR2: KIT CON TOMA DE AIRE EXTERNO. PARA CONVERTIR EN ESTANCO.
 OPTIONAL KIT-AIR2: KIT WITH EXTERNAL AIR INTAKE. FOR HERMETIC SYSTEM.
 KIT-AIR2 OPCIONAL: KIT COM ENTRADA DE AR EXTERIOR. PARA PASSAR A ESTANQUE.
 OPZIONALE KIT-AIR2: KIT CON PRESA DI ARIA ESTERNA. PER RENDERLO STAGNO.
 OPTIONNEL KIT-AIR2: KIT AVEC PRISE D'AIR EXTERNE. POUR LE TRANSFORMER EN ETANCHE.



SILENCIOSA
NOISELESS
SILENCIOSA
SILENCIOSA


POSIBILIDAD DE DESCONEXIÓN DE LA TURBINA.
 POSSIBILITY OF TURNING OFF THE TURBINE.
 POSSIBILIDADE DE DESCONEXÃO DA TURBINA.
 POSSIBILITÈ DE DÈCONNÈCTER LA TURBINE.
 POSSIBILITÀ DI DISCONNESSIONE DELLA TURBINA.



SDC	SCL								16
77	4,6	400		161	150	2x120	1x335	780x306x286	75

Features

- Double Combustion System
- Clean Glass System
- Heating power: 16kw
- Efficiency (%): 77%
- Consumption (kg/h): 4,6kg/h
- Heating capacity (m3): 400m3
- Cast-iron interior
- Manufactured in cast-iron and sheet
- Weight (kg): 161kg
- Smoke exit tube diameter (mm): 150mm
- Air channel (diameter and exit tube number): 2x120
- Forced ventilation: 1x335
- Useful chamber measures: 780x306x286mm
- Maximum logs size (cm): 75cm

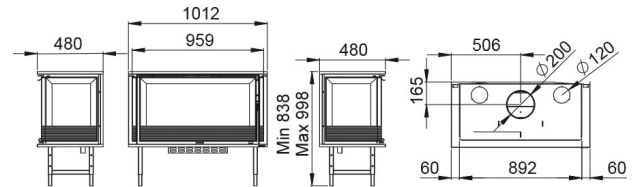

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com

