




INCLUYE INTERCAMBIADOR-ACUMULADOR TÉRMICO DE FUNDICIÓN.
 INCLUDES A CAST-IRON HEAT EXCHANGER-ACCUMULATOR.
 INCLUI INTERCAMBIADOR-ACUMULADOR TÉRMICO EM FUNDIÇÃO.
 INCLUDE SCAMBIATORE DI CALORE-ACCUMULATORE TERMICO IN GHISA.
 COMPREND UN ÉCHANGEUR DE CHALEUR-ACCUMULATEUR DE CHALEUR EN FONTE.

Features

- CANALIZATION KIT OPTIONAL
- Oasys Plus
- Double Chamber System
- Clean Glass System
- Modulation System
- Model designed for easy access to maintenance service
- Model Compatible with Kit Wifi
- Programmable
- Chamber overpressure valve
- Power max: 11,7kw
- Power max-min: 10,3-4,8kw
- Efficiency (%): 93-95%
- Consumption max-min (kg/h): 2,3-1,1kg/h
- Power consumption (W): 70-300W
- Heating capacity (m3): 258m3
- Tank capacity (Kg): 22kg
- Vermiculite interior
- Cast-iron burner
- Autonomy (h) (min-max): 9,6-20h
- Weight (kg): 122kg
- Fume outlet diameter (mm): 80mm
- Air inlet diameter (mm): 50mm
- Forced ventilation: 1x430
- Remote control or switchboard

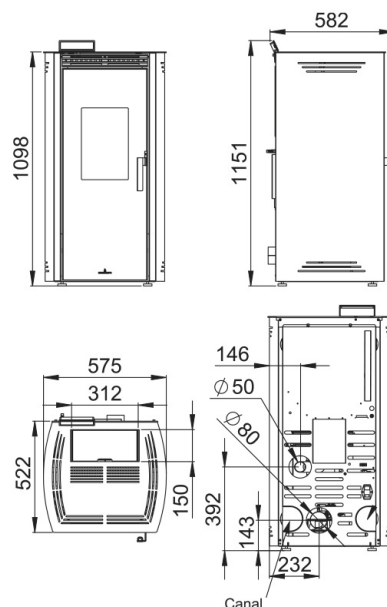

Given the continued improvement of our products and improving our manufacturing process, size, aesthetics and product specifications are subject to change without prior notice from our company.

www.bronpi.com



Features

- S1:Security systems: Safety thermostat pellet, Air flow switch
- Compatible accesories not included:WIFI KIT; CANALIZATION KIT; OPTIONAL REMOTE CONTROL